



ALLSAI®

Innovating Power



LP SERIES-GENERAL


LP-12-33 (12V33Ah)

www.allsai.com / comercial@allsai.com

LP SERIES-GENERAL / LP-12-33 (12V33AH)

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25 °C)	$C_{20}, 1.75V/cell$	33Ah
Dimension	Length	195mm (7.68inches)
	Width	130mm (5.12inches)
	Container Height	164mm (6.46inches)
	Total Height	167mm (6.57inches)
Approx Weight	9.80kg 21.6lbs)	
Terminal	T6-I(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	825A	
Internal Resistance (25 °C)	Approx 14 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50 °C (5~122°F)
	Charge	-20~40 °C (-4~104°F)
	Storage	-15~40 °C (5~104 °F)
Nominal Operating Temp. Range	25 ±3 °C (77 ±5°F)	
Max.Charging Current (25 °C)	0.3C	
Charge voltage (25 °C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.45V/cell
Temp . Coefficient	-3mV/cell/ °C	
	-5mV/cell/ °C	
E ffect of temp. to Capacity	40 °C (104 °F)	103%
	25 °C (77°F)	100%
	0 °C (32 °F)	86%
Self Discharge	≤3% per month at 25°C (77°F). LP series batteries may be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter .	

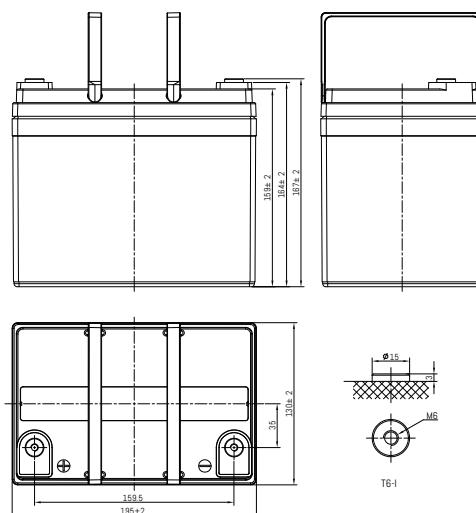

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	92.4	63.5	49.8	41.0	30.8	22.9	19.0	14.2	11.3	8.15	6.50	5.53	4.73	3.73	3.05	1.61
1.80V/cell	99.3	67.3	52.2	42.7	31.7	23.5	19.5	14.5	11.5	8.29	6.59	5.61	4.81	3.78	3.09	1.63
1.75V/cell	104.6	70.0	54.0	43.8	32.6	24.0	19.9	14.7	11.7	8.42	6.68	5.68	4.86	3.82	3.12	1.65
1.70V/cell	109.6	72.9	55.8	45.1	33.4	24.5	20.3	15.0	11.9	8.54	6.77	5.76	4.92	3.86	3.15	1.66
1.67V/cell	113.4	74.9	57.1	46.1	34.0	24.9	20.6	15.2	12.0	8.62	6.84	5.81	4.97	3.90	3.18	1.68
1.60V/cell	120.3	78.1	59.1	47.4	34.9	25.5	21.0	15.5	12.3	8.78	6.96	5.90	5.04	3.95	3.22	1.69

Constant Power Discharge (Watts/cell) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	174.7	120.9	95.3	79.0	59.5	44.4	37.0	27.6	22.1	16.0	12.8	10.9	9.37	7.39	6.06	3.23
1.80V/cell	186.1	127.3	99.4	81.7	61.1	45.4	37.8	28.1	22.5	16.3	13.0	11.1	9.50	7.49	6.14	3.26
1.75V/cell	193.9	131.5	102.1	83.6	62.4	46.2	38.4	28.6	22.8	16.5	13.1	11.2	9.60	7.57	6.19	3.30
1.70V/cell	201.1	135.8	104.8	85.5	63.7	47.1	39.0	29.0	23.1	16.7	13.3	11.3	9.70	7.64	6.25	3.33
1.67V/cell	206.4	138.8	107.1	87.1	64.7	47.7	39.5	29.3	23.3	16.8	13.4	11.4	9.78	7.70	6.29	3.35
1.60V/cell	214.7	142.9	110.0	89.2	66.1	48.6	40.2	29.8	23.7	17.1	13.6	11.6	9.89	7.80	6.37	3.39

LP SERIES-GENERAL / LP-12-33 (12V33AH)

APPLICATIONS

- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system


GENERAL FEATURES

- 5 years design life (25°C)
- Lead calcium alloy, sealed design, no watering required
- Puncture resistant micro-porous glass mat separators extend life
- Unique technology optimizes power capacity, cell consistency, and long-term reliability
- Designed for a wide range of applications


STANDARDS

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Approved
- Manufactured in Leoch® IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

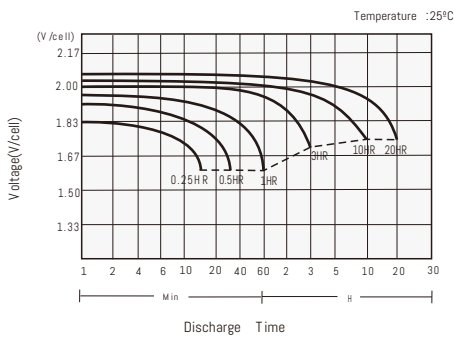


Charging Characteristics

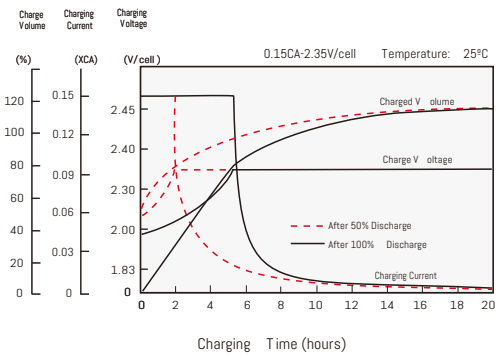

Effects of Temperature on Capacity

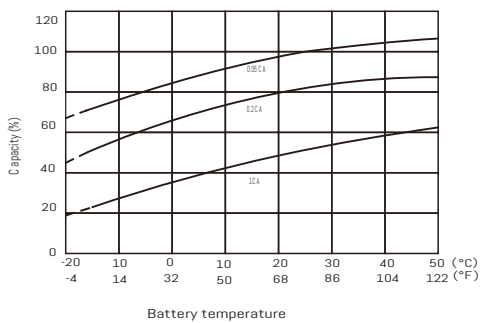

Self Discharge Characteristics

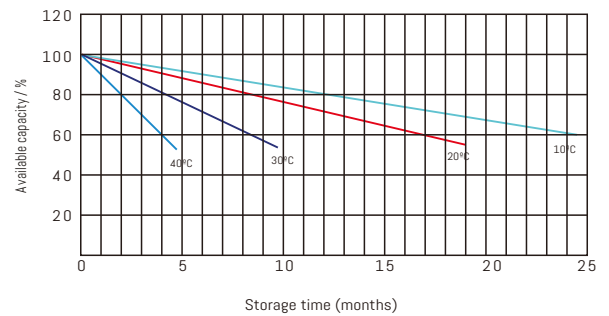



LP SERIES-GENERAL

www.allsai.com / comercial@allsai.com

ACERCA DE ALLSAI

ALLSAI es una compañía con más de 15 años de experiencia en el mercado latinoamericano destacándose por innovar continuamente en las diferentes soluciones de respaldo de energía.

Actualmente contamos con un amplio portafolio de soluciones que agrega valor al negocio de nuestros clientes, logrando posicionar nuestra marca en toda la región con un sello de calidad y respaldo que hace la diferencia.

